

mody

MSP SERIES

DRY PIT

WET PIT

PORTABLE

3" to 8" / 80 - 200 mm
DISCHARGE SIZES

MOTORS

2 Pole 7.5 to 46 HP / 5.5 - 34 kW
4 Pole 7.5 to 100 HP / 5.5 - 75 kW
6 Pole 4.6 to 55 HP / 3.4 - 41 kW
8 Pole 25 to 30 HP / 19 - 22 kW
208/230/460/575 Volts 60 HZ

FLOWS

to 4,200 US GPM / 16,000 LPM

HEADS to 330 FT / 100 M

CHANNEL IMPELLER

VORTEX IMPELLER



mody
Pumps

mody

MSP SERIES

FEATURES


- High Efficiency Motors - Class H (180°C) Insulation
- “Fast-Change” SC/SC Cartridge Mechanical Seals
- Modular Design, Interchange Components
- Adjustable Wear Ring System
- Vortex or Enclosed Impeller, on same Shaft
- “Fast-Lock”, Quick-Release, Latch-Bolts
- Oil Tap Drain
- Interchangeable parts with Pumpex® brand models
- Easy Retrofit to Pumpex®/Flygt® and other brand installations
- Optional, Integral “Eco-Friendly” Cooling System

mody

SPECIFICATIONS	MSP2	MSP3	MSP4
HP / KW Range	4.6 - 19 HP / 3.4 - 14 KW	20 - 46 HP / 15 - 34 KW	20 - 100 HP / 15 - 75 KW
Max Flow Range - GPM / LPM	1,800 GPM / 6,814 LPM	2,400 GPM / 9,085 LPM	4,200 GPM / 16,000 LPM
Max Shut-off Head - Feet / Meters	220' / 67 M	330' / 100 M	196' / 60 M
Discharge Size - Inches / MM	3", 4", 6" / 75, 100, 150	3", 4", 6" / 75, 100, 150	8" / 200
Solid Handling - Inches / MM	Up to 4" / 100 MM	Up to 4" / 100 MM	Up to 4" / 100 MM
Impeller Type	Vortex / Channel	Vortex / Channel	Channel
Max Temp of Pumped Fluid	104°F / 40°C	104°F / 40°C	104°F / 40°C
Max Starts / Stops per Hour	15	15	15
Max Submergence Ft / M	66' / 20 M	66' / 20 M	66' / 20 M
Motor - Squirrel Cage / VFD Rated	2, 4, 6 Pole	2, 4, 6 Pole	4, 6, 8 Pole
Siemens Design - IP68 Enclosure	Yes	Yes	Yes
UL Listed Components	Yes	Yes	Yes
Die Cast Aluminum Rotor	Yes	Yes	Yes
Moisture & Thermal Overload Protection	Yes	Yes	Yes
Power Supply 208/230/460/575 Volts	Yes	Yes	Yes
Ball Bearings - Radial / Thrust	Single / Double	Single / Double	Single / Double
Power & Moisture Sensor Cables Ft / M	33' / 10 M	33' / 10 M	33' / 10 M
Cartridge Mechanical Seals	Yes	Yes	Yes
Cooling Jacket System - Optional	Yes	Yes	Yes

MODULAR DESIGN

- Multiple Configurations
- Mix & Match Module Components
- Motor Housings
- Motor Stators
- Motor Rotors & Cartridge Seals
- Pump Impellers
- Pump Volutes

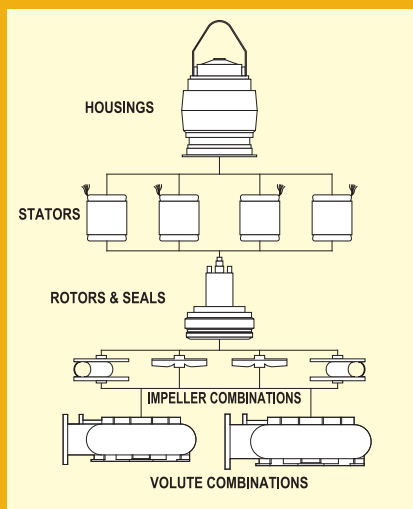

MSP2, 3 & 4 COMPONENTS

Stator Casing	Cast iron ASTM A-48, Class 35
Pump Volute / Casing	Cast iron ASTM A-48, Class 35
Casing Wear Ring	Cast iron ASTM A-48, Class 35
Lifting Handle	AISI 316 Stainless Steel
Impeller	Ductile iron ASTM A-395, Grade 60-40-18
Shaft	AISI 431 Stainless Steel
Shaft Sleeve	AISI 431 Stainless Steel
Hardware	AISI 304 Stainless Steel
Mechanical Seal	SC / SC
O-Rings	Nitrile Rubber



Mody Pumps® Inc.

2166 Zeus Court, Bakersfield, CA 93308. USA
 Tel.: (661) 392-7600 • Fax: (661) 392-7601
<http://www.modypump.com>
 E-mail: sales@modypump.com