



# ELECTRIC SUBMERSIBLE DRAINAGE PUMP

## M-530 SERIES

PORTABLE ELECTRIC  
SUBMERSIBLE PUMP  
FOR  
CORROSIVE & ABRASIVE  
APPLICATIONS

.....

### Model M-530T 4" Flange or Hose

(Medium Volume - Medium Head)

.....

Also Available 1 HP to 35 HP

## M-530 DESIGN ADVANTAGES

- Built-in automatic ON/OFF/ON thermal overload switches protect the motor. Thermal Protectors wired directly to built-in contactor for maximum reliability.
- Equipped with moisture sensor that detects progressive seal wear and automatically shuts down the pump.
- Stainless Steel Strainer, Shaft, Impeller, Outlet and Hardware for maximum corrosion resistance.
- Choice of impeller materials:
  - 1) 304/316 Stainless Steel for sea water and corrosive applications and;
  - 2) Hardened 410 Stainless Steel for abrasive applications.
- Tandem Tungsten Carbide/Tungsten Carbide and Tungsten Carbide/Tungsten Carbide mechanical seals.
- Mechanical Seals in wholly enclosed pressure compensated oil chamber.
- Field adjustable Nitrile Rubber-lined Diffuser/Wear Plate optimizes efficiency throughout the life of the pump.
- Can also be equipped with sacrificial Zinc Anodes for maximum life in a saline fluid environment.




34750 Lencioni Avenue, Bakersfield, CA 93308. USA  
Tel.: (661) 392-7600 • Fax: (661) 392-7601  
<http://www.modypump.com> • E-mail: [sales@modypump.com](mailto:sales@modypump.com)



# mody

## ELECTRIC SUBMERSIBLE DRAINAGE PUMP

### M-530 SERIES 7.5 HP

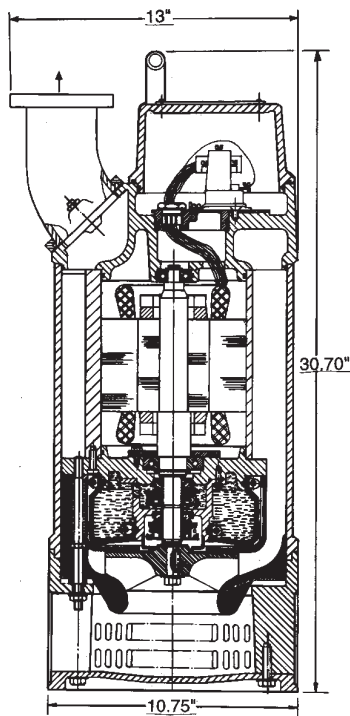

### 7.5 HP PERFORMANCE CURVE

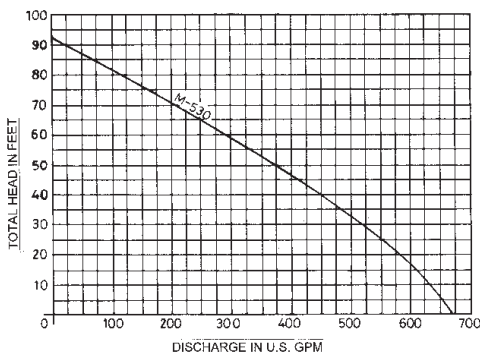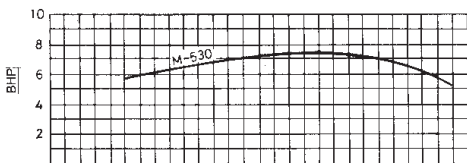

### M-530 SERIES

#### MATERIALS OF CONSTRUCTION AND ENGINEERING DATA

##### MOTOR

2-pole induction **continuous rated** motor with squirrel cage rotor.  
Stator insulation class 'F' (155°)  
Speed: 3450 RPM @ 60 Hz, 2850 RPM @ 50 Hz  
Power Rating: 7.5 HP, Full Load  
Current: (11 Amps at 460 Volts)  
Max. temperature of the pump liquid: 104°F  
Max. start/stop per hour: 15

##### POWER SUPPLY

3 Phase, 50/60 Hz, AC Supply.  
Available in any voltage frequency combination. (208/220/230/380/415/460/575 V)  
The pump is equipped with built-in contactor which trips at excessively high temperature through the bimetallic switches in the winding.

##### BALL BEARINGS

The rotor shaft is carried in two single-row, deep-groove ball bearings.  
The bearings are enclosed with high temperature grease-containing special anti-corrosion additive.

##### POWER CABLE

Waterproof/oil-proof, rubber-insulated, neoprene-sheathed copper conductor flexible cable, 50' length.

##### SHAFT SEAL

Tandem Tungsten Carbide/Tungsten Carbide and Tungsten Carbide/Tungsten Carbide mechanical seals wholly enclosed in a pressure compensated oil chamber.

##### CORROSION RESISTANT

Epoxy coated Cast Aluminum Alloy Outer Casing.  
Epoxy coated Extruded Aluminum Inner Casing.  
Stainless Steel rotating elements.  
Nitrile rubber-coated Diffuser/Wear Plate.

##### STRAINER

Stainless Steel with  $1\frac{3}{16}$ " x  $\frac{3}{8}$ " rectangular holes.

##### SUBMERGENCE

Submergence below liquid surface min. 6", max. 50 ft.

##### WEIGHT M-530T

Without cable 132 lbs.

Due to product development, specifications may be subject to change.